
# RECESSED DAM DX-SA|

## Jellemz?k

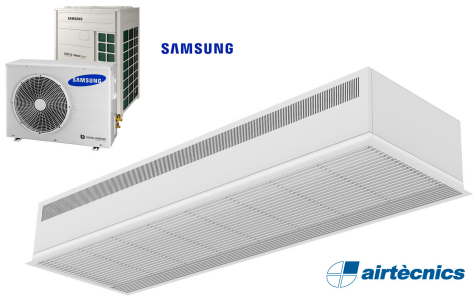




- Kompaktní a nízkoprofilová zapušt?ná vzduchová clona s plnou m?ížkou a energeticky úsporným tepelným ?erpadlem: Až 70% snížení náklad? a emisí CO2 (režim vytáp?ní).
- Samonosná konstrukce plášt? z pozinkované ocelové desky, p?ipraveno k instalaci zapušt?ní do podhledu.
- Vzduchová m?ížka (bez údržby) vyrobena z hliníkových profil? a vyfukovací trysky, integrována do jediného rámu v bílé barv? RAL 9016.Jiné barvy jsou dostupné na vyžádání.
- Odst?edivé ventilátory s dvojitým nasáváním pohán?né motorem s vn?jším rotorem a nízkou hlu?ností. 5rychlostní p?epína?.EC modely vybaveny ventilátory s velmi nízkou energetickou spot?ebou.
- Zahrnuje pouze topnou dx cívku s nainstalovanými teplotními ?idly.
- Advanced Plug&Play control. Includes: Advanced PRO control with integrated LCD screen, door contact, 7m RJ11 cable and remote control. With integrated functions: door delay (configurable); operation, alarm and maintenance warning signals; and multiple digital inputs that modify the curtain's operation.
- Includes protective varnish for the electronic board and control.
- DX VRF:

## M?szaki adatok

50Hz

## Méretek

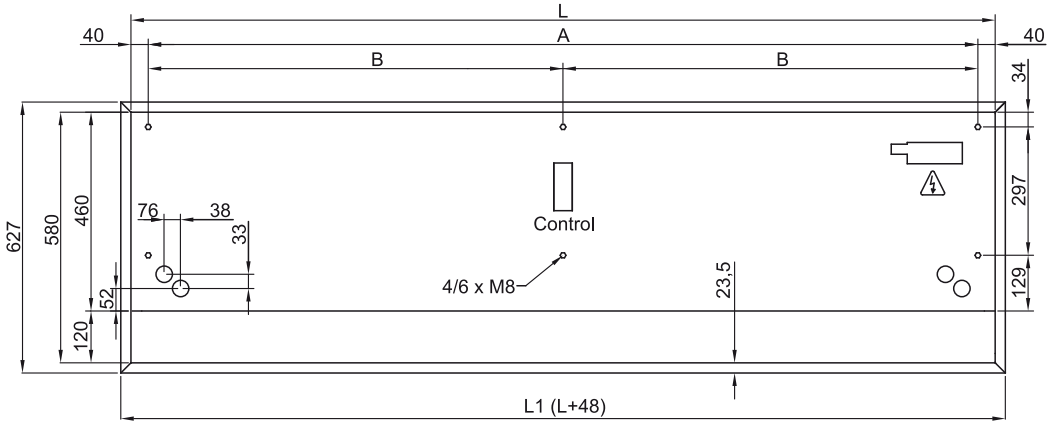

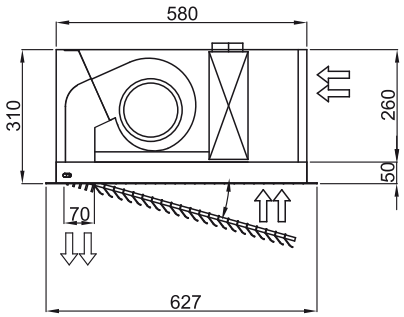
| | L | L1 | A | B |
|---|---|---|---|---|
| Recessed Dam 1000 | 1000 | 1048 | 920 | - |
| Recessed Dam 1500 | 1500 | 1548 | 1420 | 710 |
| Recessed Dam 2000 | 2000 | 2048 | 1920 | 960 |
| Recessed Dam 2500 | 2500 | 2548 | 2420 | 1210 |